


Venus Bar 3 group Spec Sheet

Water Requirements

- 3/8" dedicated cold water line with shut-off valve and compression fitting (Direct Connect version only).
- Water hardness cannot exceed 3gpg or 50 ppm. If water hardness exceeds 3gpg a water softener must be installed.
- Minimum incoming water flow rate of 35 GPH and maximum line pressure of 70 PSI / 5 BAR.

Power Requirements

- Volts: 220 (voltage range of 208-240)
- Watts: 2700
- Amp draw: 12
- Receptacle: Nema 6-20



Nema 6-20

Water Softening Equipment

1. Water Softener Capacity: Single - 4400 gpg
2. Water Softener Capacity: Double - 8800 gpg
3. Water Softener Capacity: Triple - 13200 gpg
4. Water Softener Capacity: Automatic - Programmable
5. Water Softener Capacity: Manual - 4400 gpg

The average water consumption of this machine is 6 gallons per day, which represents 196 drinks at 4oz per drink.

Water Softener/Maintenance Calculation

Cartridge Grain Capacity	÷	Water Hardness (grains per gallon)	=	Gallon Capacity of Cartridge	÷	Gallons of Water Used per Day	=	Days Until Cartridge Needs to be Replaced
_____	÷	_____	=	_____	÷	_____	=	_____

Shipping Dimensions & Weight



- Height: 36 inches
- Depth: 27 inches
- Width: 36 inches
- Weight: 205 pounds

Counter Space Requirements

- Height: 43 inches
- Depth: 20 inches
- Width: 20 inches
- Weight: 180 pounds

Drain Requirements

- Open gravity drain of minimum 1.25 inch I.D., within 4 feet of the machine.

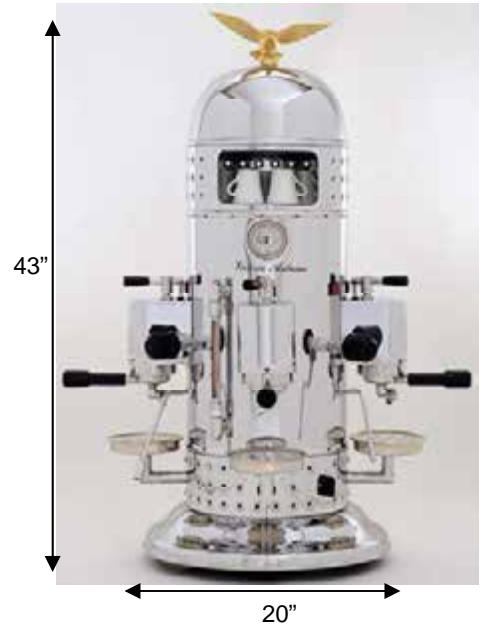

I, the customer, understand that these requirements must be in when the installer arrives. Failure to have the site ready will result in additional service and travel charges, and may cause further delays in installation.

Customer Name: _____ Signature: _____
 Company Name: _____
 Phone: _____ Fax: _____ Email: _____